


GENERAL CHARACTERISTICS


A flow switch, for liquid or gaseous media, with magnetical actuation of a reed switch.



I M1 Ex ia I
II 1G Ex ia IIC T4
II 1D Ex iaD 20 T135




DIMENSIONS

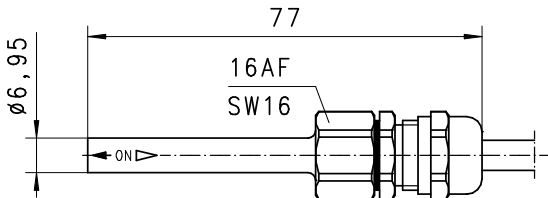

ELECTRICAL DATA

reed switch
cable 1.5 m
30 V 1 A 50 W
temperature Tu max. 50°C
protection class IP 65

wiring 0.442
n.c. or n.o. depending
on installation position

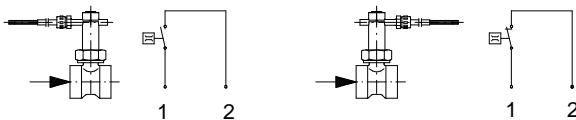

APPLICATION FOR TYPE

| switch unit | type |
|-------------|------|
| A-U1 | UR1 |
| | UR2 |
| | NW1 |



NOMENCLATURE

| A-U1 | -1 | basic type specification |
|------|----|-------------------------------|
| A-U1 | | ● switch unit A-U1 |
| | -1 | ● wiring 0.225 / type UR1/UR2 |
| | -2 | ● wiring 0.225 / type NW1 |

All technical changes reserved

●BASIC Standard ○BASIC Programme option □VARIO Special option ⊕ PLUS Accessories ✗ not recommendable